


Velocitykvm-5

Multi-Mode Fiber Extension – RGB/DVI Display

QUICK START GUIDE

Each Thinklogical™ **Velocitykvm-5** Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by two multi-mode fiber optic cables (or by one optional single-mode fiber). The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The **Velocitykvm-5** supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. Available options include USB 2.0 (high speed up to 480Mbps).

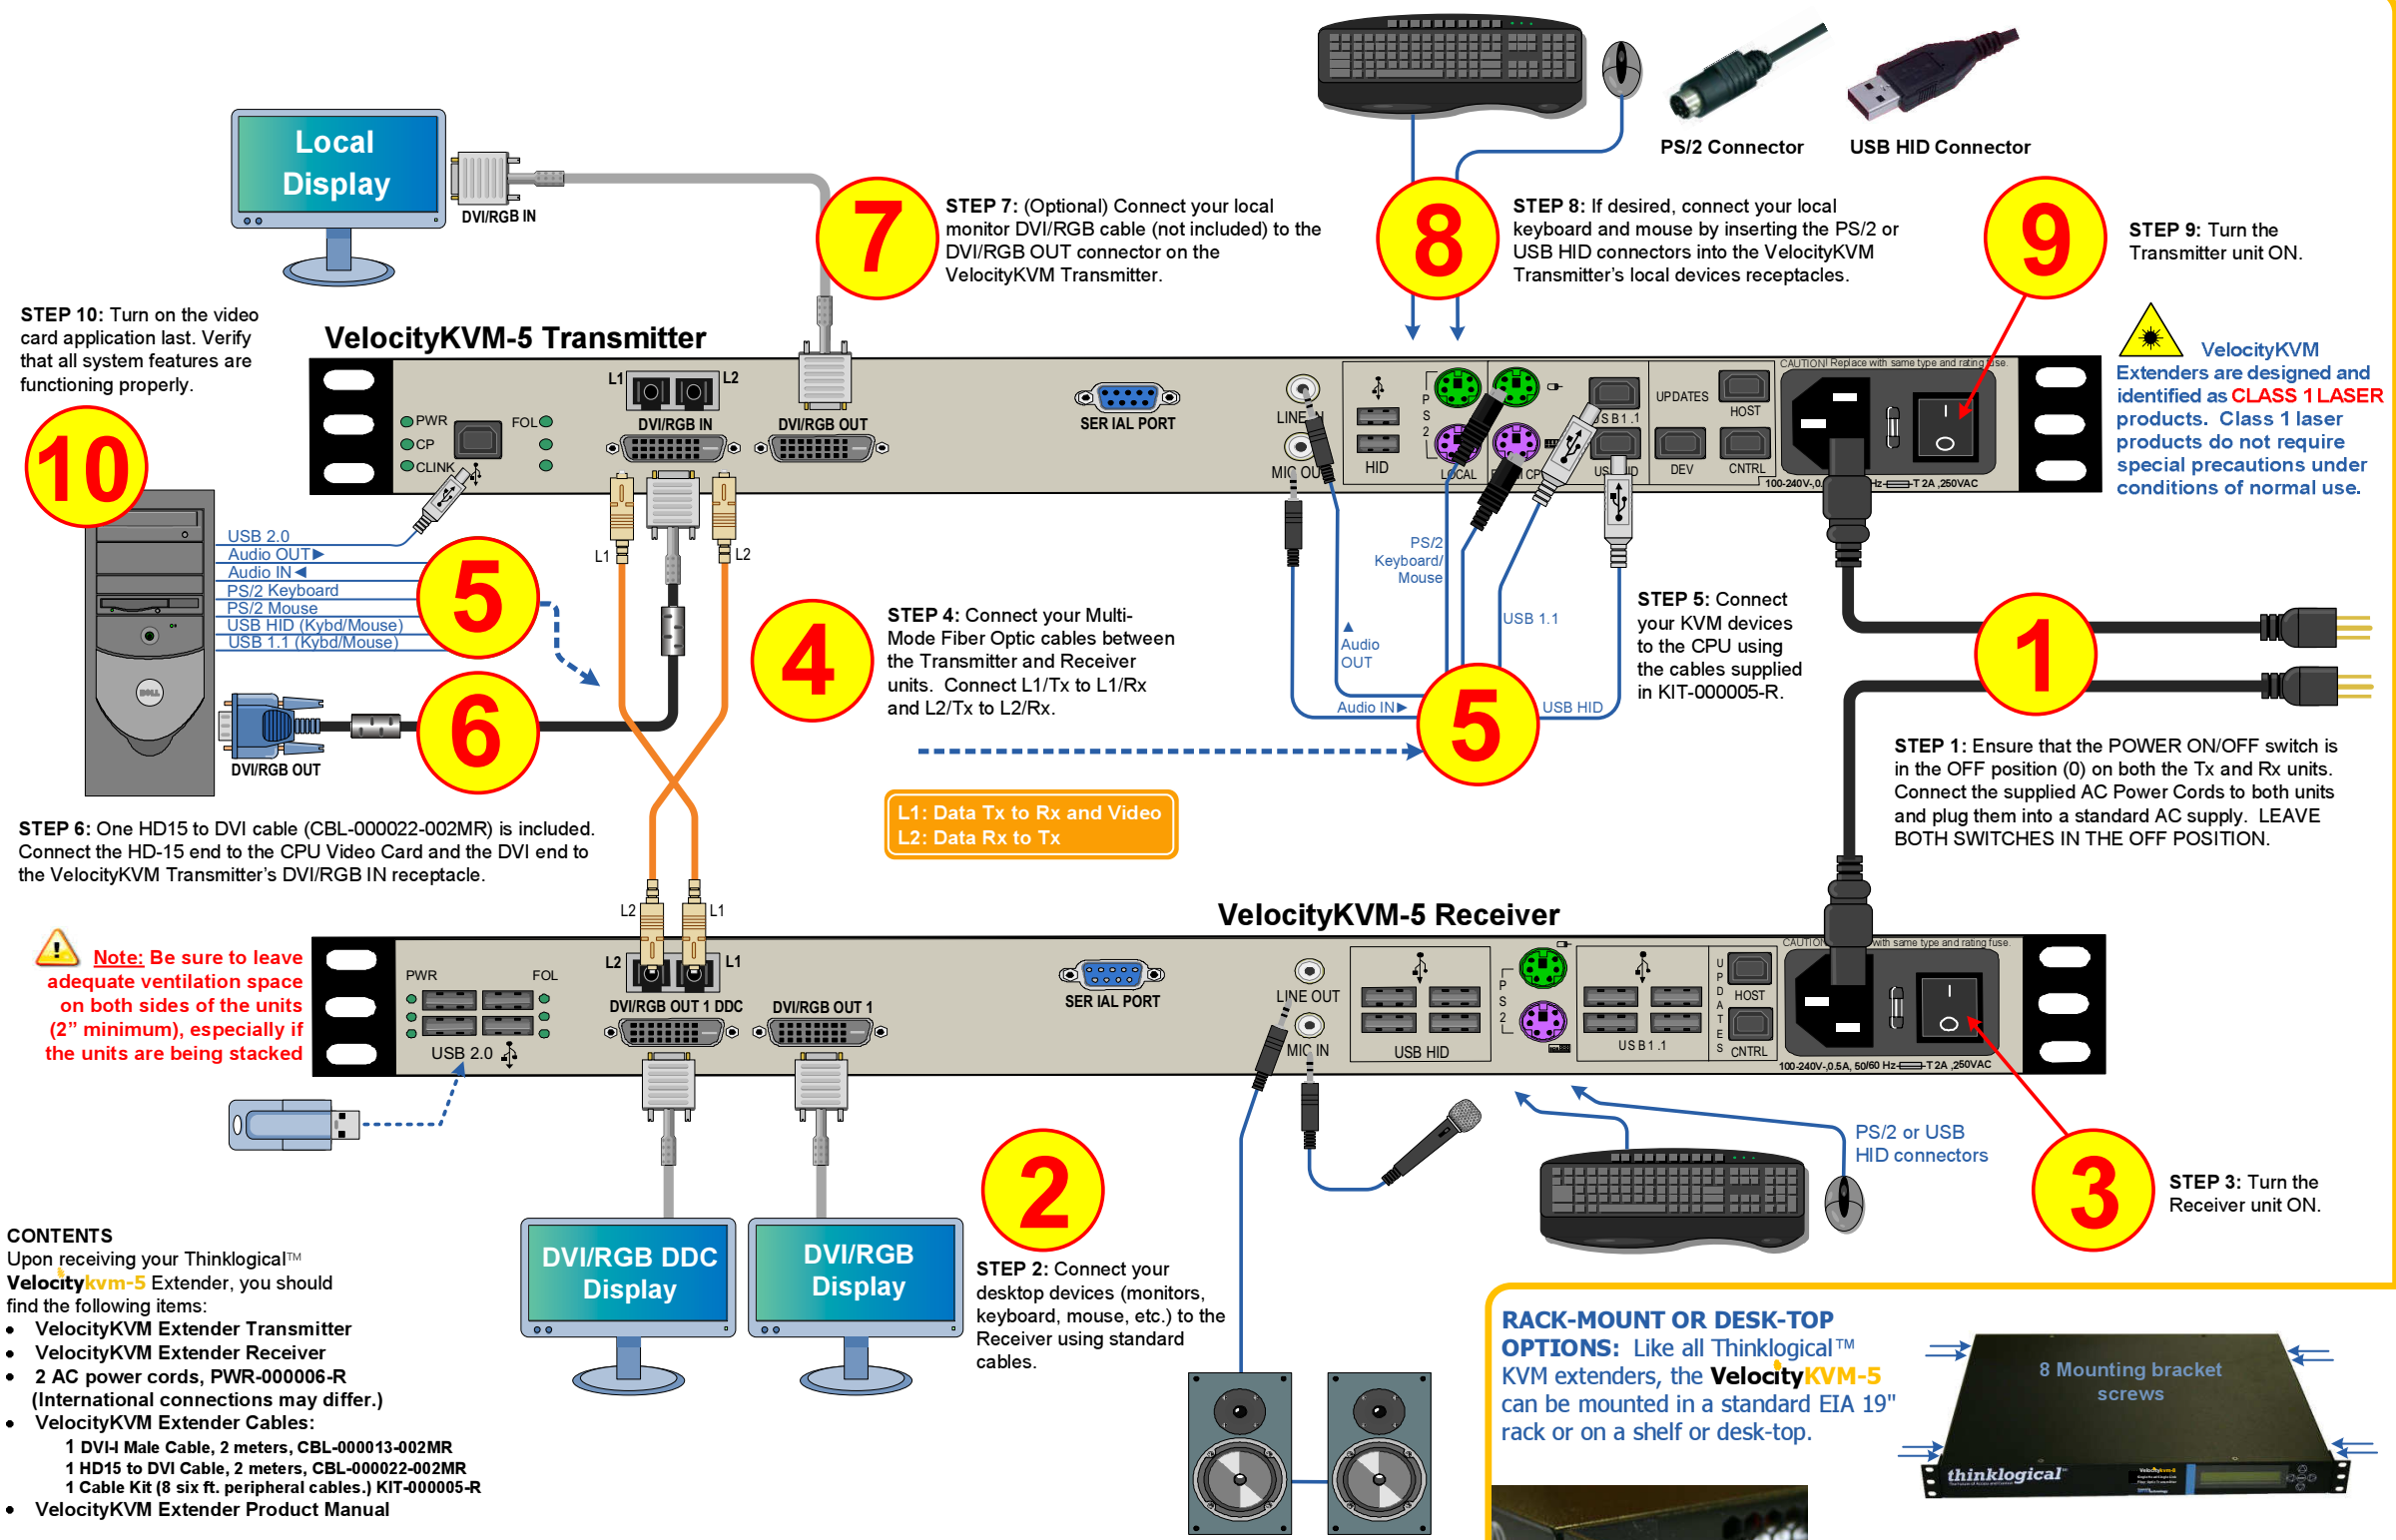

STEP 10: Turn on the video card application last. Verify that all system features are functioning properly.

STEP 10: Turn on the video card application last. Verify that all system features are functioning properly.


STEP 6: One HD15 to DVI cable (CBL-000022-002MR) is included. Connect the HD-15 end to the CPU Video Card and the DVI end to the VelocityKVM Transmitter's DVI/RGB IN receptacle.

Note: Be sure to leave adequate ventilation space on both sides of the units (2" minimum), especially if the units are being stacked


- CONTENTS**
Upon receiving your Thinklogical™ **Velocitykvm-5** Extender, you should find the following items:
- VelocityKVM Extender Transmitter
 - VelocityKVM Extender Receiver
 - 2 AC power cords, PWR-000006-R (International connections may differ.)
 - VelocityKVM Extender Cables:
 - 1 DVI-I Male Cable, 2 meters, CBL-000013-002MR
 - 1 HD15 to DVI Cable, 2 meters, CBL-000022-002MR
 - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R
 - VelocityKVM Extender Product Manual

All physical connections to the product use industry-standard connectors.

RACK-MOUNT OR DESK-TOP OPTIONS: Like all Thinklogical™ KVM extenders, the **VelocityKVM-5** can be mounted in a standard EIA 19" rack or on a shelf or desk-top.



2 Mounting bracket screws in four places.

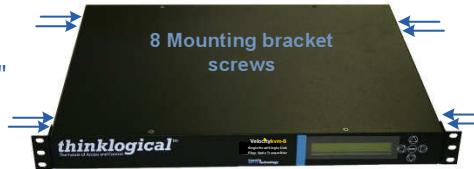

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting.

thinklogical™

PHONE: (800) 291-3211
WEBSITE: www.thinklogical.com
EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of Thinklogical™ products.

Velocitykvm-35


Multi-Mode Fiber Extension – Three DVI Displays

Each Thinklogical™ Velocitykvm-35 Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by four multi-mode fiber optic cables. The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The Velocitykvm-35 supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. USB 2.0 (high speed up to 480Mbps) is optional.


QUICK START GUIDE

Multi-Mode Fiber-Optic Cable Guide:
 L1: Data Tx to Rx and Video 1
 L2: Data Rx to Tx
 L3: Video 2
 L4: Video 3

STEP 9: Turn on the Source (CPU) last. Verify that all system features are functioning properly.

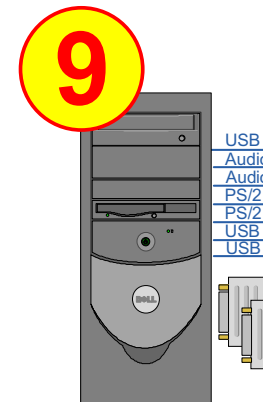


VelocityKVM-35 Transmitter

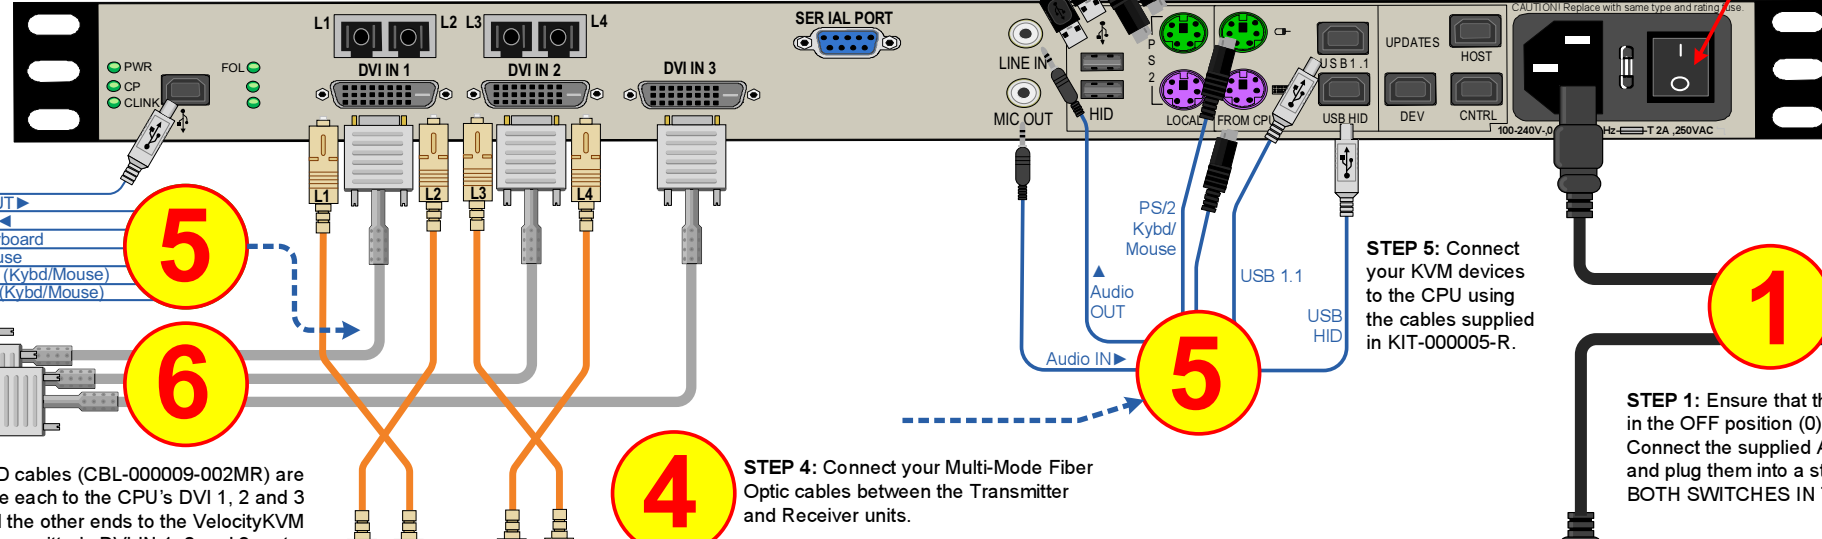


STEP 6: Three DVI-D cables (CBL-000009-002MR) are included. Connect one each to the CPU's DVI 1, 2 and 3 Video Cards and the other ends to the VelocityKVM Transmitter's DVI IN 1, 2 and 3 ports.



Note: Be sure to leave adequate ventilation space on both sides of the units (2" minimum), especially if the units are being stacked.

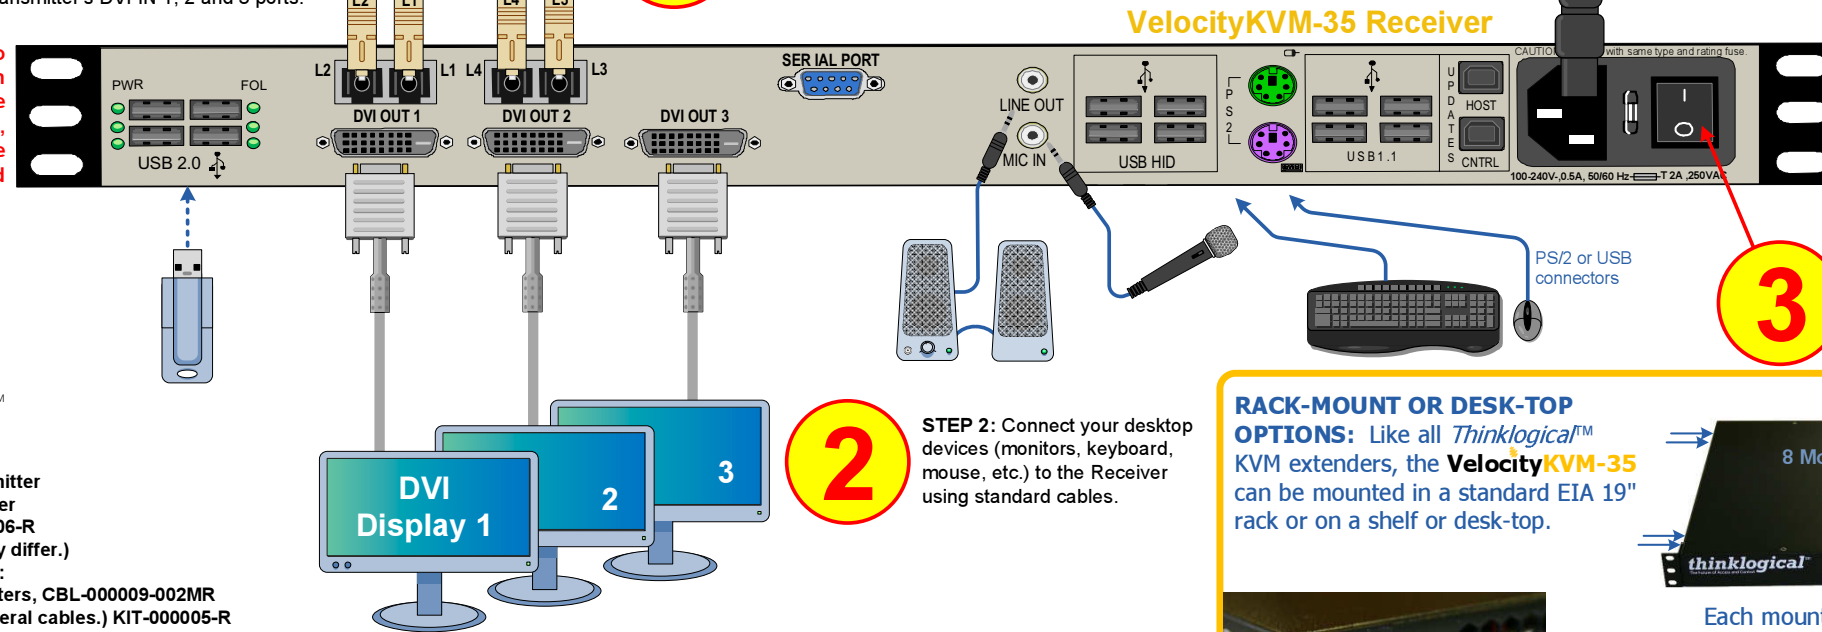

STEP 2: Connect your desktop devices (monitors, keyboard, mouse, etc.) to the Receiver using standard cables.

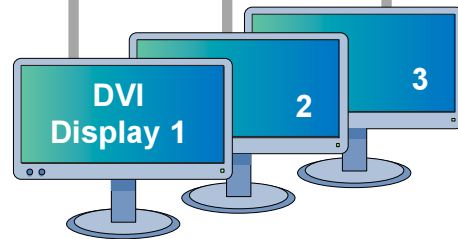

RACK-MOUNT OR DESK-TOP OPTIONS: Like all Thinklogical™ KVM extenders, the VelocityKVM-35 can be mounted in a standard EIA 19" rack or on a shelf or desk-top.

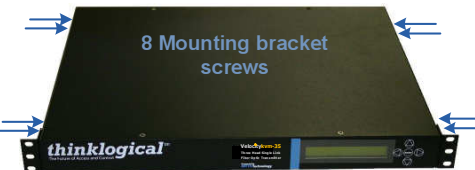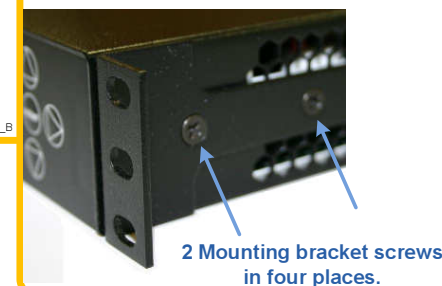

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting after power has been removed from the unit. All screws should be reinstalled after the brackets have been removed.

CONTENTS

Upon receiving your Thinklogical™ Velocitykvm-35 Extender, you should find the following items:

- VelocityKVM Extender Transmitter
- VelocityKVM Extender Receiver
- 2 AC power cords, PWR-000006-R (International connections may differ.)
- VelocityKVM Extender Cables:
 - 3 DVI-D Male Cables, 2 meters, CBL-000009-002MR
 - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R
- VelocityKVM Extender Product Manual

All physical connections to the product use industry-standard connectors.

PHONE: (800) 291-3211
 WEBSITE: www.thinklogical.com
 EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of Thinklogical™ products.