

Velocitykvm-35


Multi-Mode Fiber Extension – Three DVI Displays

Each Thinklogical™ Velocitykvm-35 Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by four multi-mode fiber optic cables. The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The Velocitykvm-35 supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. USB 2.0 (high speed up to 480Mbps) is optional.

QUICK START GUIDE

Multi-Mode Fiber-Optic Cable Guide:
 L1: Data Tx to Rx and Video 1
 L2: Data Rx to Tx
 L3: Video 2
 L4: Video 3

STEP 9: Turn on the Source (CPU) last. Verify that all system features are functioning properly.

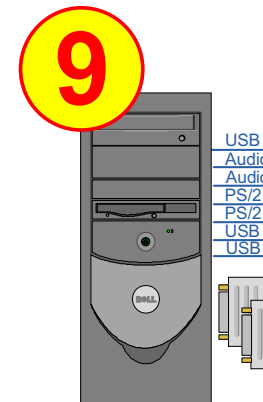

STEP 6: Three DVI-D cables (CBL-000009-002MR) are included. Connect one each to the CPU's DVI 1, 2 and 3 Video Cards and the other ends to the VelocityKVM Transmitter's DVI IN 1, 2 and 3 ports.


Note: Be sure to leave adequate ventilation space on both sides of the units (2" minimum), especially if the units are being stacked.

CONTENTS



Upon receiving your Thinklogical™ Velocitykvm-35 Extender, you should find the following items:

- VelocityKVM Extender Transmitter
- VelocityKVM Extender Receiver
- 2 AC power cords, PWR-000006-R (International connections may differ.)
- VelocityKVM Extender Cables:
 - 3 DVI-D Male Cables, 2 meters, CBL-000009-002MR
 - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R
- VelocityKVM Extender Product Manual

All physical connections to the product use industry-standard connectors.

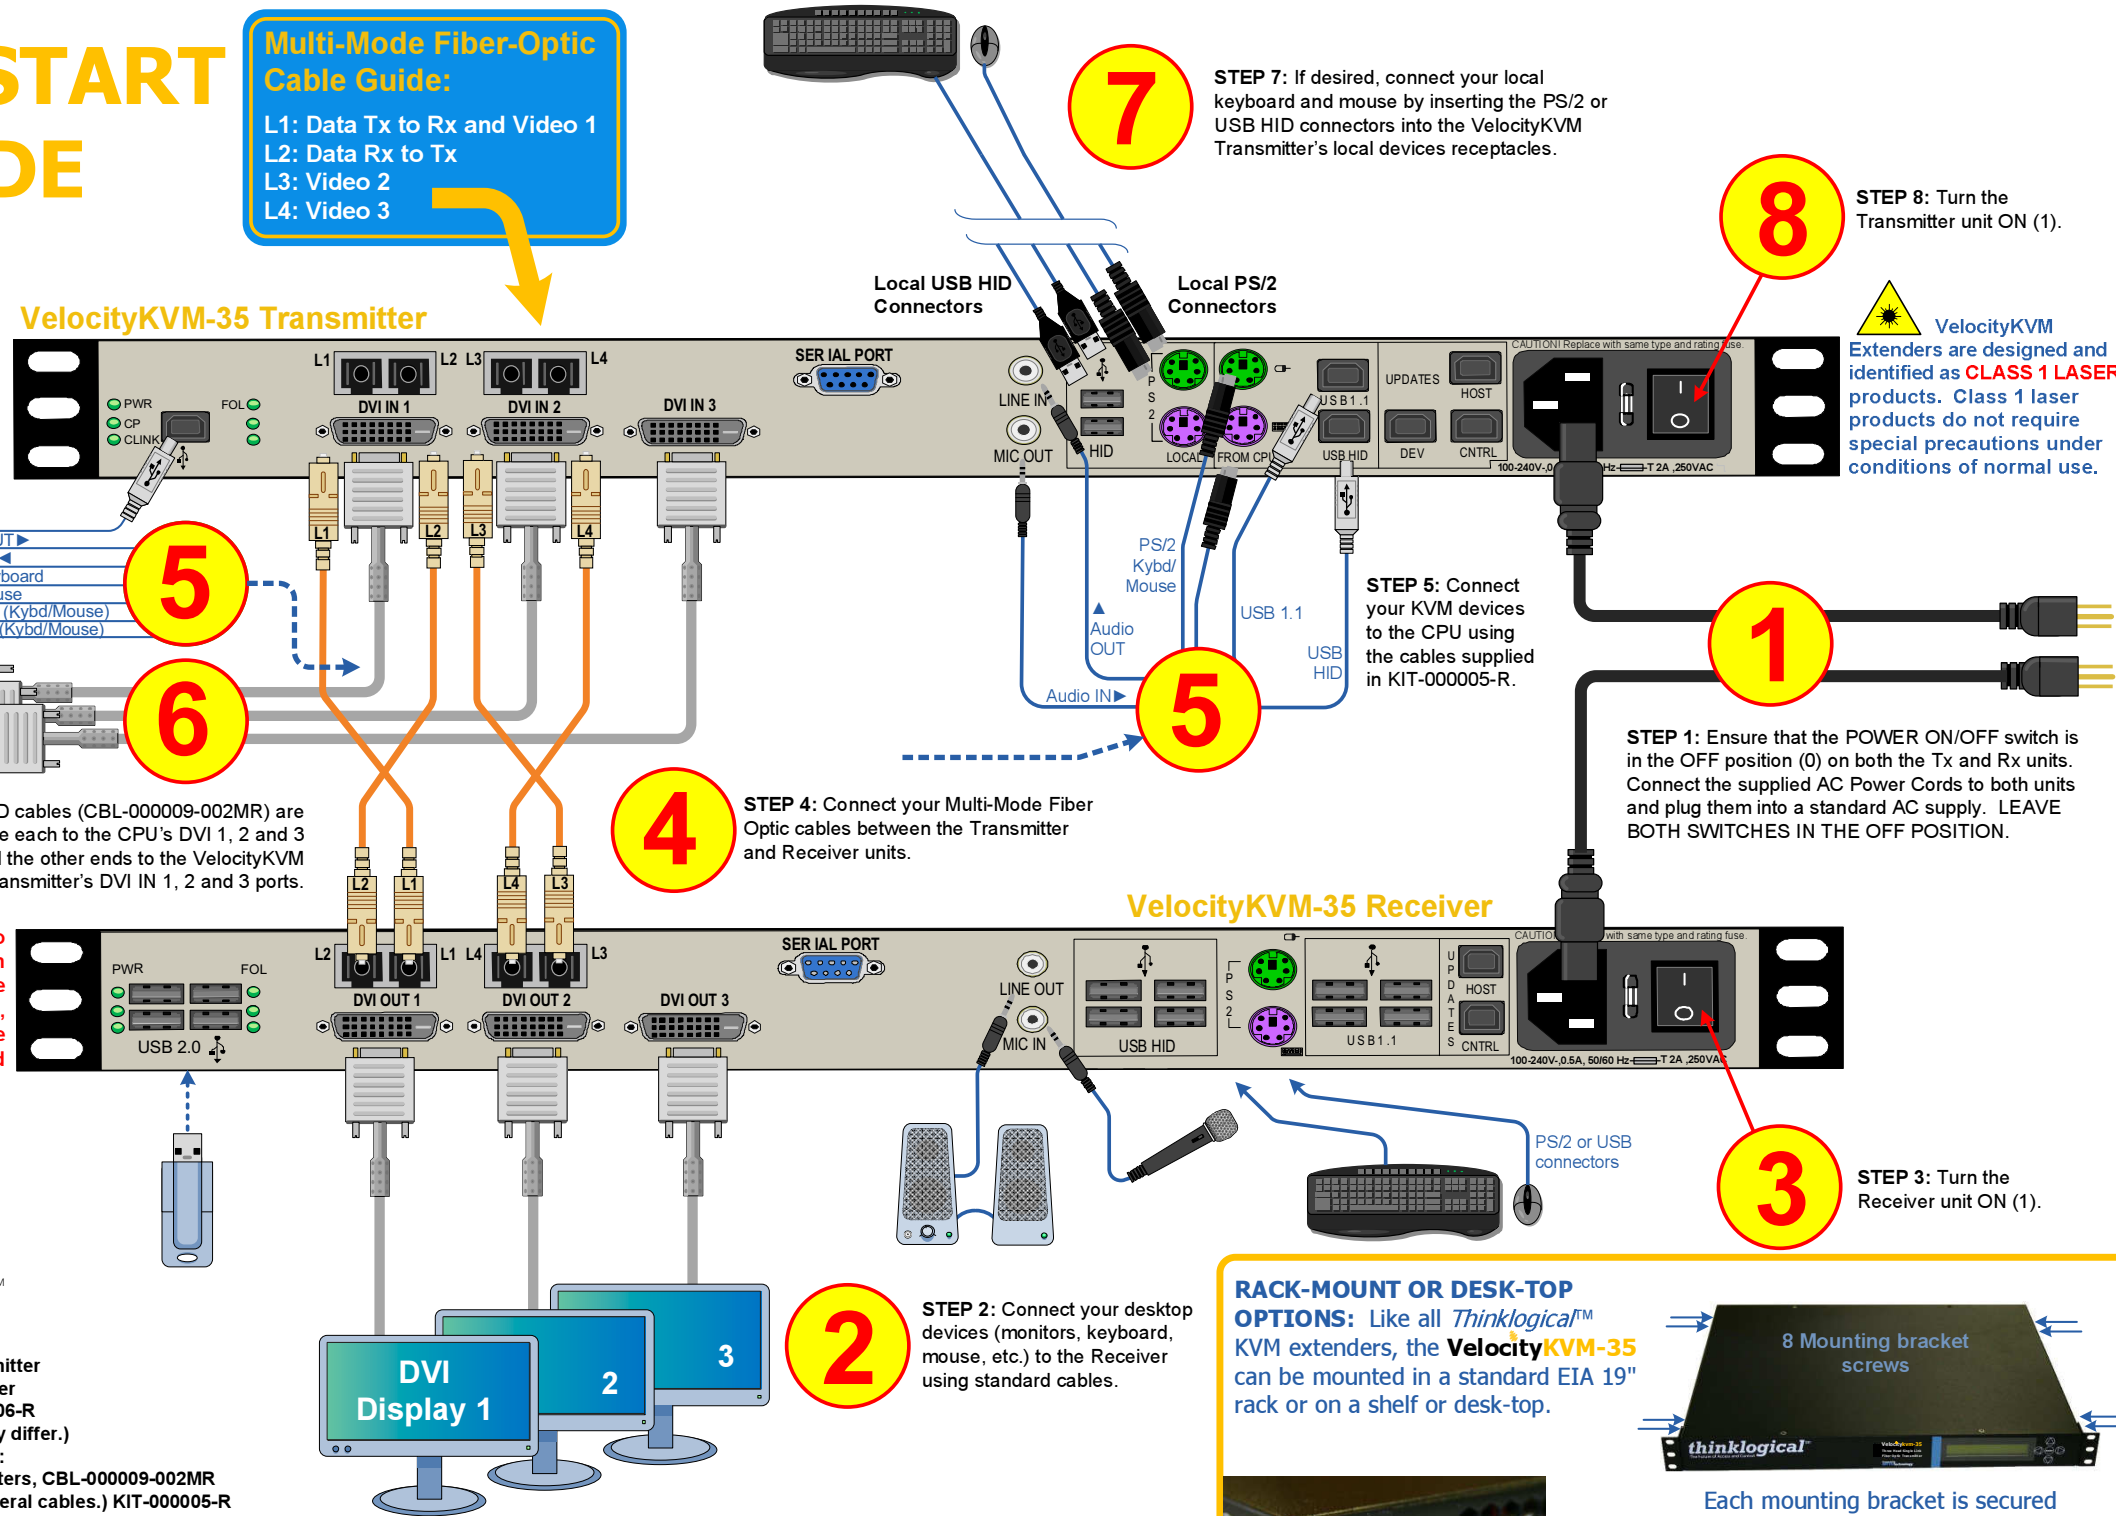

RACK-MOUNT OR DESK-TOP OPTIONS: Like all Thinklogical™ KVM extenders, the Velocitykvm-35 can be mounted in a standard EIA 19" rack or on a shelf or desk-top.

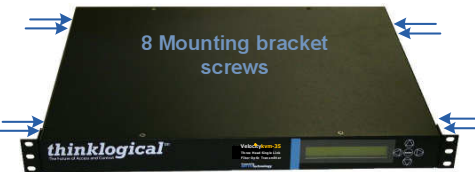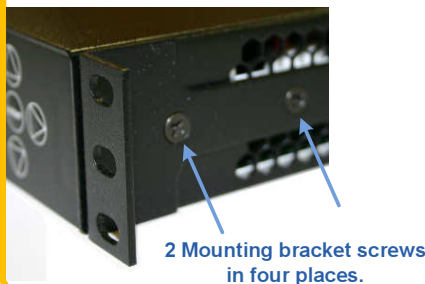

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting after power has been removed from the unit. All screws should be reinstalled after the brackets have been removed.

thinklogical™

PHONE: (800) 291-3211
 WEBSITE: www.thinklogical.com
 EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of Thinklogical™ products.