


SDI Xtreme^{3G+}

3G SDI Fiber Optic Extension

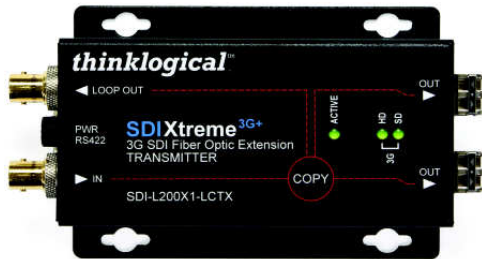

- Extends SDI signals over fiber - A single fiber supports two SD/HD signals or one 3G signal
- RS-422 port for device control - Ideal for remote camera operations requiring pan, tilt and zoom functions
- Multi-standard operation from 270 mbit/s to 3Gbit/s
- SMPTE 424M, 292M, 259M, 372M, 425 level A and B compliant
- Supports 3G/HD/SD SDI inputs with embedded audio and ancillary data
- Additional options for the transmitter component include loop-out, or dual channel, which provides two multiplexed (1.485 Gbps) signals transmitted and received over a single fiber
- Uses standard SFP+ optics with LC connectors - does not require costly SFP+ pathological modules
- Auto detects input video format and displays on LEDs

The Logical Solution - Serial Digital Interface Extension

The SDI Xtreme 3G+ product series is a compact, broadcast quality, SDI over fiber extension system. The system is designed to transmit up to two SD/HD signals or one 3G SDI signal with or without embedded audio and data, and is SMPTE 424M, 292M, 259M, 372M and 425 level A and B compliant. In addition, this fiber based transport system gives users the assurance that each signal is immune to video pathological signals over the entire length of the fiber interconnect, while supporting all pathological patterns at all rates. The system also supports either single or multi-mode fiber, and is fully compatible with Thinklogical's VX and HDX Router line of products.

The SDI Xtreme 3G+ provides industry leading performance and reliable media conversion for a wide variety of applications. Therefore, it is an ideal solution for Pro A/V, broadcast, and corporate studio applications, including video production and editing, sports tele-production, field production, cross-town fiber links, cross on-campus production, pre-fibered venues, courtesy feeds and many more.

thinklogical[™]
www.thinklogical.com


The System

The reliability of the SDI Xtreme 3G+ stems from the quality of its design and construction, with advanced integrated re-clocking circuitry designed into the transmitter and receiver. Equalized and re-driven SDI loop-through is also provided on the transmitter. These key features provide assurance that the signal is equalized and re-clocked prior to fiber transmission; therefore it retains all of the signal's initial parameters allowing for pristine re-clocked SDI outputs on the receiver. Additional options for the transmitter component include loop-out, or dual channel, which provides two multiplexed (1.485 Gbps) signals transmitted and received over a single fiber. Status LEDs indicate system activity and link activity.


Installation possibilities are expanded with built-in support for either multi-mode or single mode fiber, making this a convenient and cost-effective solution to combat the restrictions involved with the distribution of uncompressed broadcast quality video signals over long distances. In addition, the standard SFP+ optics are hot-swappable/pluggable with LC connectors. An RS-422 connector provides a full duplex channel to send/receive data, making it ideal for remote camera operations (such as pan, tilt and zoom), and access to video and audio players/recorders.

The system provides transmitter and receiver models as well as a transceiver model for bi-directional video extension.

Typical application extending SDI video using SDI Xtreme 3G+ - with Loop Out Option - TX/RX System

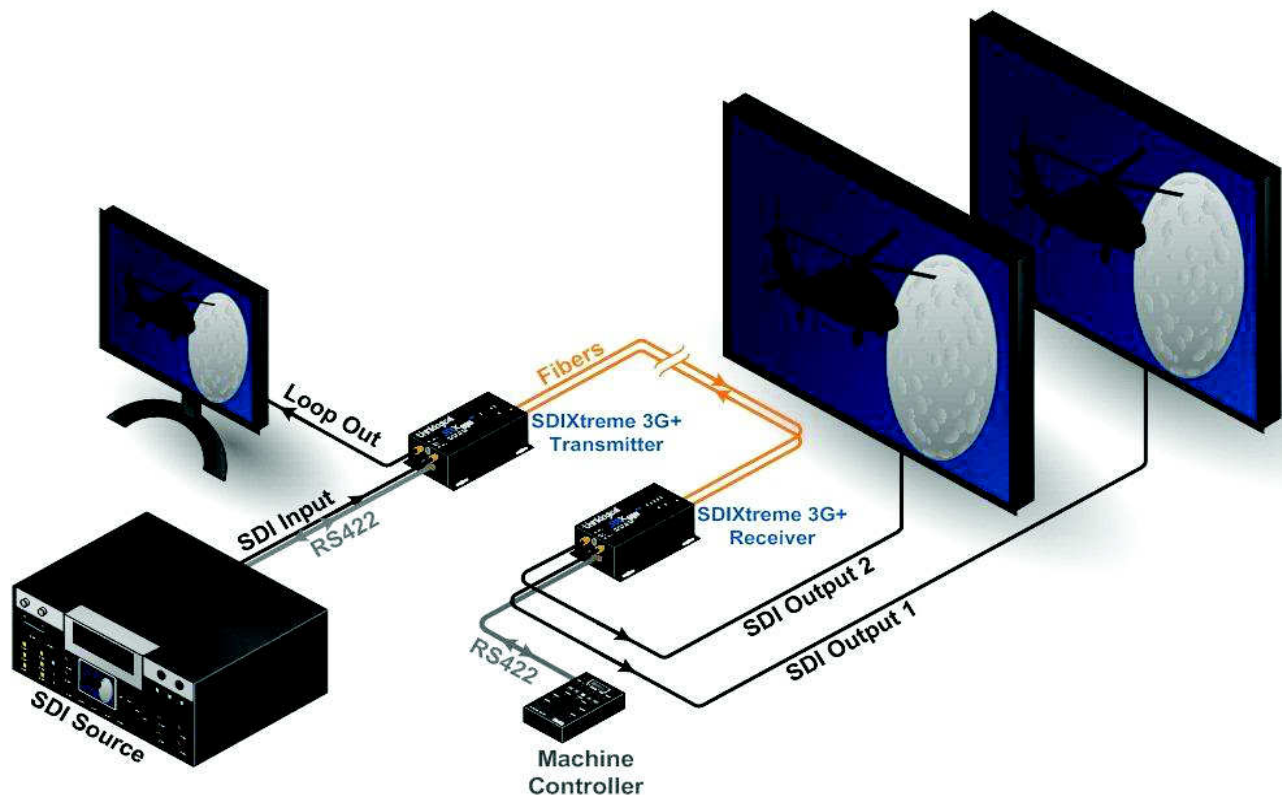

Typical application extending SDI video using SDI Xtreme 3G+ - with Two Input/Multiplexed Option - TX/RX System

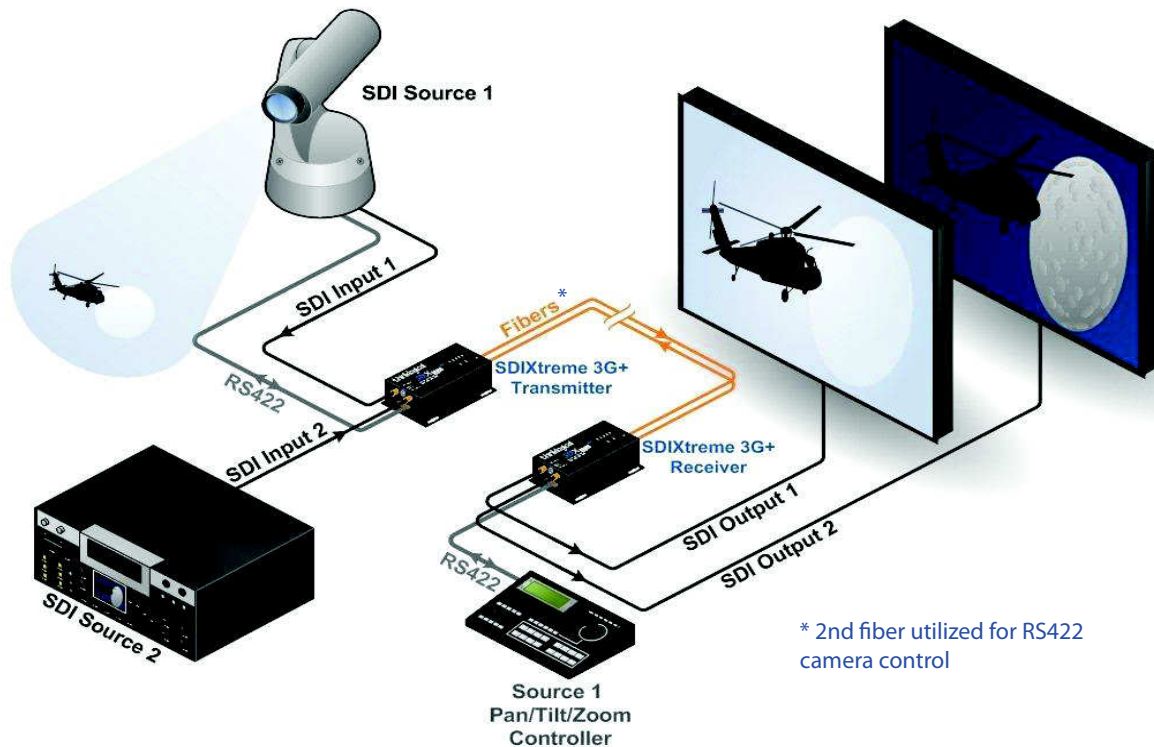

Key Features

- Extension of up to two SD/HD signals or one 3G SDI signal over a single fiber
- Multi-standard operation from 270 mbit/s to 3Gbit/s
- Supports 3G/HD/SD SDI inputs with embedded audio and ancillary data
- RS-422 port for device control - Ideal for remote camera operations requiring pan, tilt and zoom functions
- Signal transmission via fiber optic cable; no RF interference
- SMPTE 424M, 292M, 259M, 372M and 425 level A and B compliant
- Cable equalization on inputs and cable drivers on outputs to ensure signal integrity
- Supports pathological patterns at all rates
- Transceiver model available for bi-directional video extension
- Equalized and re-clocked SDI loop through on the transmitter
- Additional options for the transmitter component include loop-out, or dual channel, which provides two multiplexed (1.485 Gbps) signals transmitted and received over a single fiber
- Signals are recovered and re-clocked on the receiver
- Low Cost - Hot Swappable/Pluggable standard SFP+ optics with LC connectors
- Distribute uncompressed broadcast quality signals over single mode fiber up to 40 km. (24 miles) and up to 1000 meters over multi-mode fiber
- Support for standard 2.97 (3G), 1.485 (HD), 270 (SD), and fractional 1/1.001 rates
- Compatible with all Thinklogical VX and HDX Routers
- Auto detects input video format and displays on LEDs

SPECIFICATIONS

Indicators:	(3) Power, Data Rate SD, HD, 3G – Lock Detect - Active
Dimensions:	Height: 1.68" (4.3cm) Depth: 3.427" (8.7cm) Width: 5.609" (14.25 cm)
Weight:	<1lb (0.45kg) each Shipping Weight: 4lb (1.81kg) pair
Power:	5-12 VDC @< 1AMP
Operating Temperature:	-5° C to +50° C

TRANSMITTER Specifications:

Number of SDI Inputs	1 - 2
Data Rate Range	270Mbps to 2.97 Gbps
Supported Standards	SMPTE 424M, 292M, 259M, 372M and 425 level A and B compliant
Re-clocked Data Rates	270 Mbps (SMPTE 259M), 1.485 Gbps (SMPTE 292), 2.97 Gbps (SMPTE 424M)
Equalization	Automatic up to 140m of Belden 1694A at 3.0 Gbps, 230m at 1.485 Gbps and 350m at 270 Mbps
Return Loss	>10dB up to 2.97 Gbps
Number of Loop Outs - 1	Number of Optical Outputs - 2
Signal Level	800mV ± 10%
DC Offset	0V ± 0.5V
Overshoot	< 10% of amplitude
Timing Jitter	< 0.2 UI at 270 Mbps; < 1.0 UI at 1.485 Gbps; < 0.2 UI at 2.97 Gbps with color bar signal
Alignment Jitter	< 0.2 UI at 270 Mbps; < 1.0 UI at 1.485 Gbps; < 0.3 UI at 2.97 Gbps with color bar signal
Rise/Fall Time	< 135 ps at 2.97 Gbps per SMPTE 424M; < 270 ps at 1.485 Gbps per SMPTE 292;
Re-clocking	At 270 Mbps, 1.485 Gbps & 2.97 Gbps
	0.4 ns to 1.5 ns at 270 Mbps per SMPTE 259M


Optical Output

Connector	LC receptacle	
Fiber Type	Multi-mode	Single Mode
Wavelength (nominal)	850nm	1310nm
Emmitter Type	VCSEL	DFB Laser
Output Power (nominal)	-4dBm	-1.5dBm
Re-clocking	At 270 Mbps, 1.485 Gbps & 2.97 Gbps	

RECEIVER Specifications:**Fiber Input**

Connector	LC receptacle	
Fiber Type	Multi-mode	Single Mode
Wavelength	770 – 860nm	1260 - 1360nm
Minimum Input Sensitivity	-12dBm	-15dBm
Maximum Input Power	0 dBm	0.5dBm
Number of SDI Outputs 1 - 2		Rise/Fall Time
Signal Level	800mV ± 10%	< 135 ps at 2.97 Gbps per SMPTE 424M;
DC Offset	0V ± 0.5V	< 270 ps at 1.485 Gbps per SMPTE 292;
Overshoot	< 10% of amplitude	0.4 ns to 1.5 ns at 270 Mbps per SMPTE 259M
Timing Jitter	< 0.2 UI at 270 Mbps; < 1.0 UI at 1.485 Gbps; < 0.2 UI at 2.97 Gbps with color bar signal	Re-clocking
Alignment Jitter	< 0.2 UI at 270 Mbps; < 1.0 UI at 1.485 Gbps; < 0.3 UI at 2.97 Gbps with color bar signal	At 270 Mbps, 1.485 Gbps & 2.97 Gbps

SDIXtreme 3G+ Single Part Numbers and Descriptions

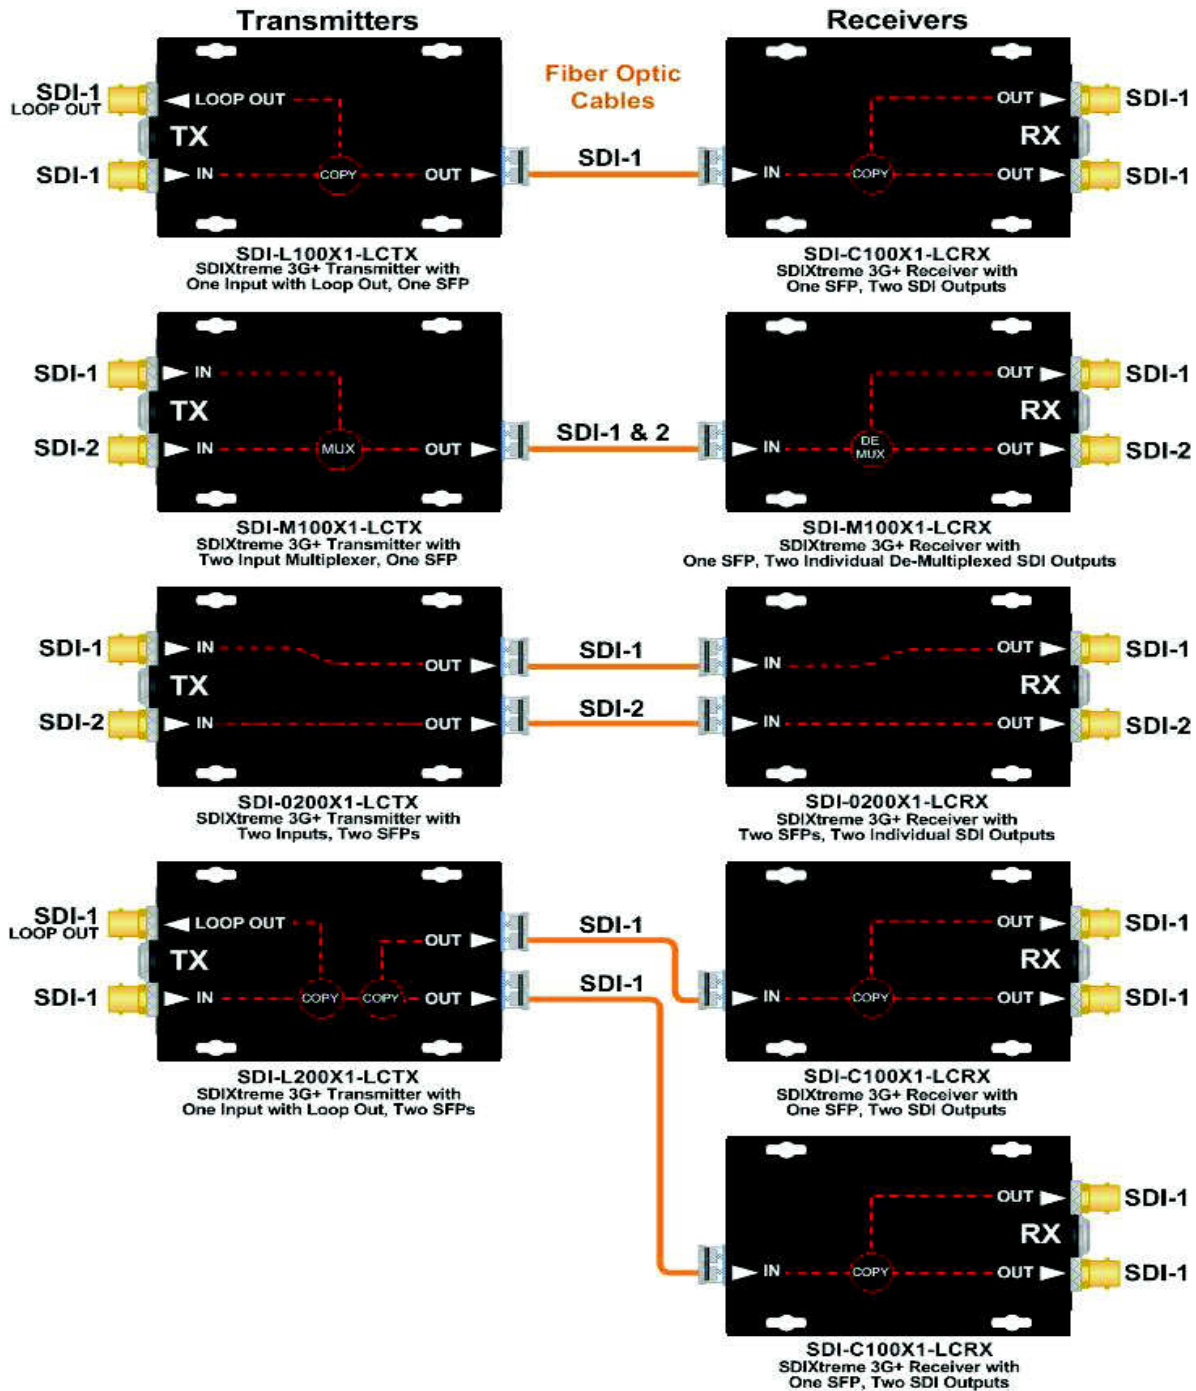

© 2010 Thinklogical. All rights reserved.
 Thinklogical, claims or other product information contained in this document are subject to change without notice. This document may not be reproduced, in whole or in part, without the express written consent of Thinklogical.



100 Washington Street
 Milford, CT 06460 USA

Contact a Thinklogical Sales Representative at
sales@thinklogical.com or (203) 647-8700