


# Velocitykvm-4

Multi-Mode Fiber Extension System – DVI Two Display

## QUICK START GUIDE

The Thinklogical™ Velocitykvm-4 Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by two multi-mode fiber optic cables (or by one or two optional single-mode fibers). The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The Velocitykvm-4 supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. USB 2.0 (high speed up to 480Mbps) is optional.

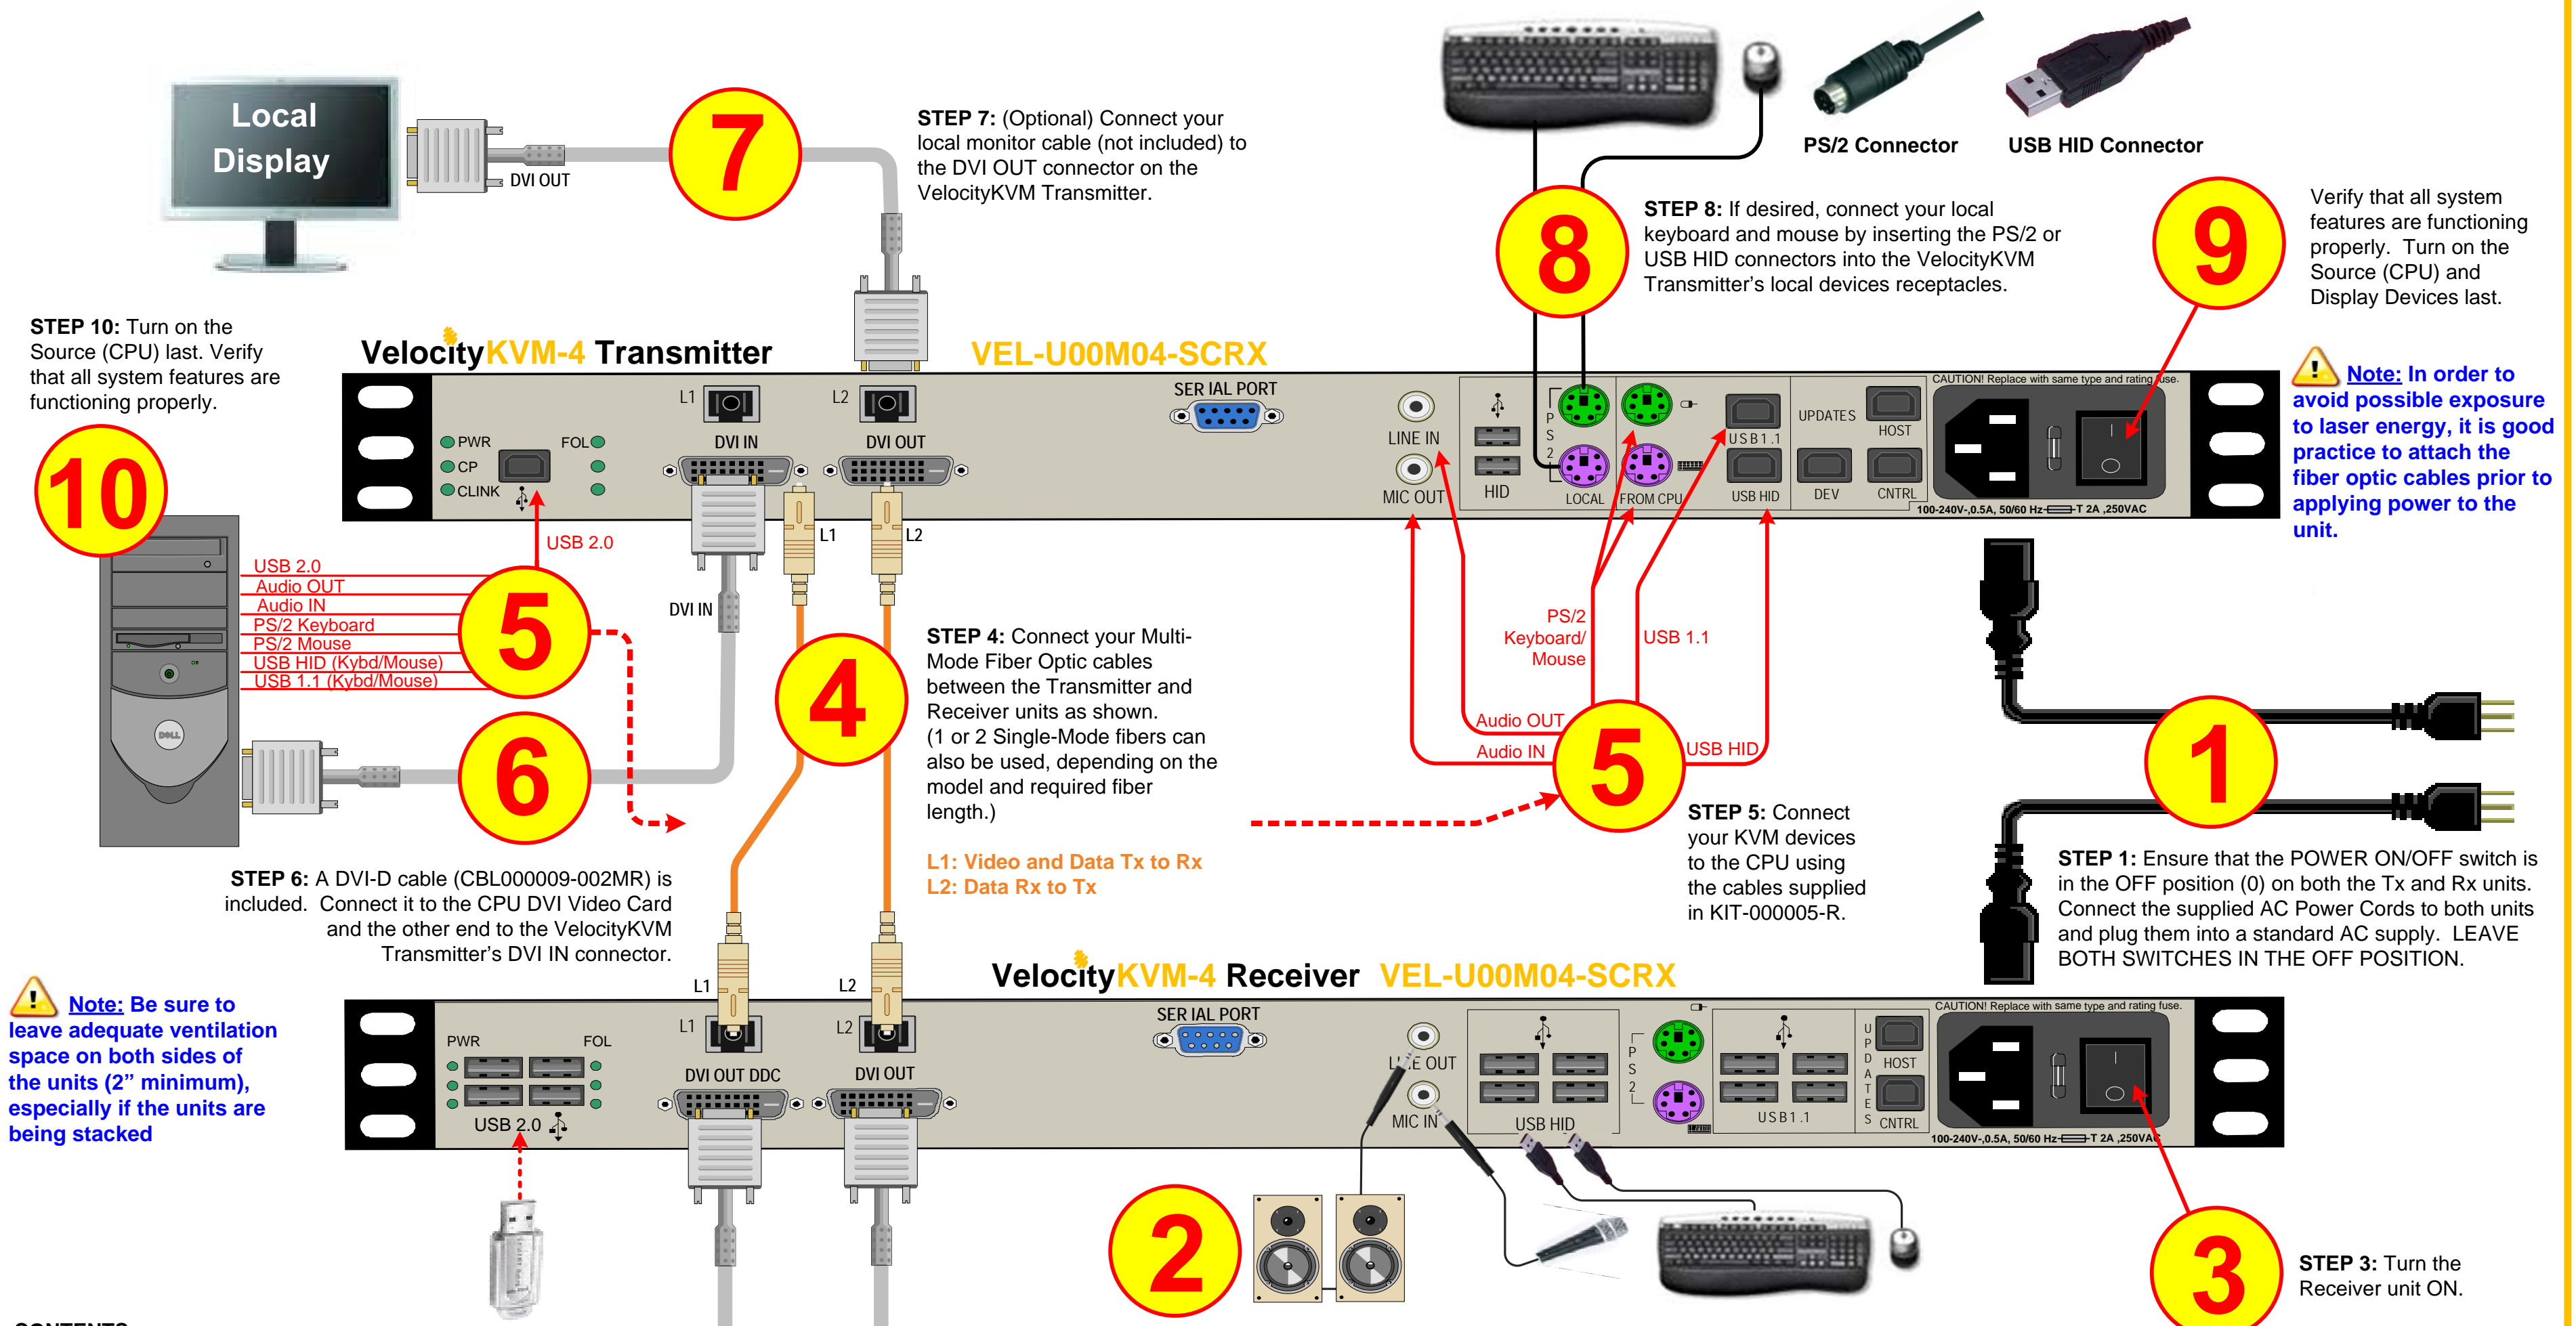

- CONTENTS**
- Upon receiving your Thinklogical™ Velocitykvm-4 Extender you should find the following items:
- VelocityKVM Extender Transmitter
  - VelocityKVM Extender Receiver
  - 2 AC power cords, PWR-000006-R (International connections may differ.)
  - VelocityKVM Extender Cables:
    - 1 DVI-D Male Cable, 2 meters, CBL000009-002MR
    - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R
  - VelocityKVM Extender Product Manual

All physical connections to the product use industry-standard connectors.

**RACK-MOUNT OR DESK-TOP OPTIONS:** Like all Thinklogical™ KVM extenders, the VelocityKVM-4 can be mounted in a standard EIA 19" rack or on a shelf or desk-top.

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting.



PHONE: (800) 291-3211  
 WEBSITE: www.thinklogical.com  
 EMAIL: support@thinklogical.com

Visit us online at [www.thinklogical.com](http://www.thinklogical.com) for more product information, current updates and the complete line of Thinklogical products.