


Velocitykvm-24

Multi-Mode Fiber Extension – DVI Two Display

QUICK START GUIDE

Each Thinklogical™ Velocitykvm-24 Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by three multi-mode fiber optic cables (or by one optional single-mode fiber). The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The Velocitykvm-24 supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. Options include USB 2.0 (high speed up to 480Mbps).

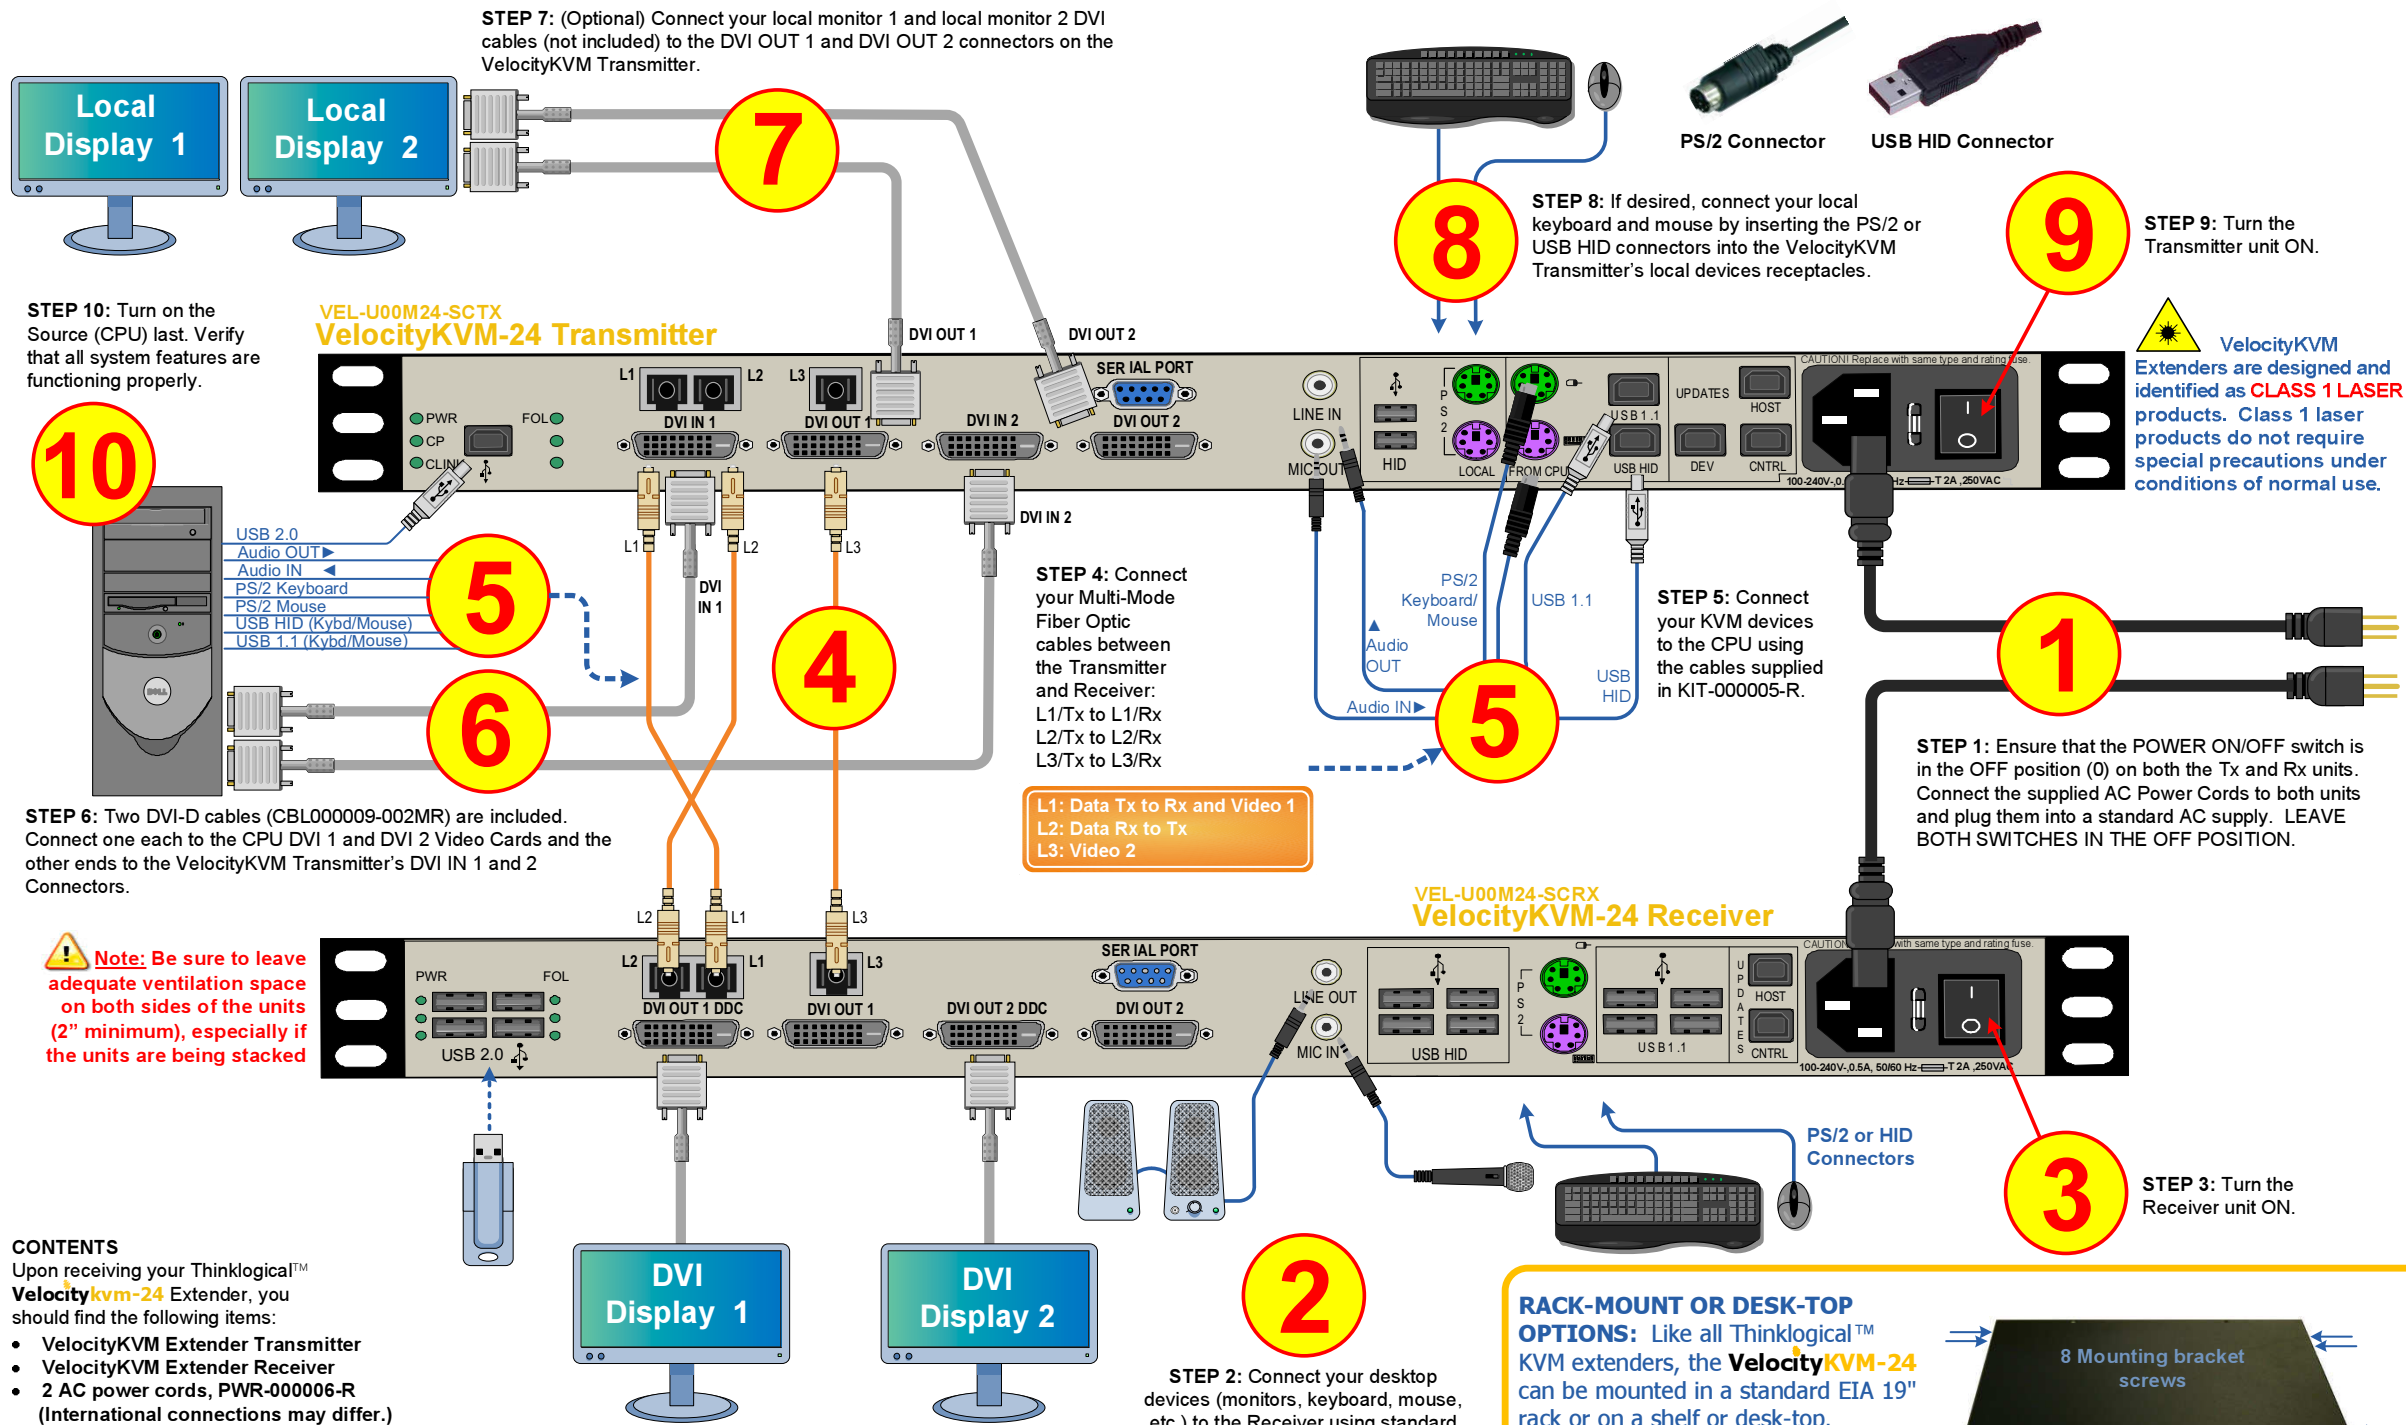

STEP 10: Turn on the Source (CPU) last. Verify that all system features are functioning properly.

10

VEL-U00M24-SCTX
VelocityKVM-24 Transmitter

- USB 2.0
- Audio OUT
- Audio IN
- PS/2 Keyboard
- PS/2 Mouse
- USB HID (Kymbd/Mouse)
- USB 1.1 (Kymbd/Mouse)

5



6

STEP 6: Two DVI-D cables (CBL000009-002MR) are included. Connect one each to the CPU DVI 1 and DVI 2 Video Cards and the other ends to the VelocityKVM Transmitter's DVI IN 1 and 2 Connectors.

Note: Be sure to leave adequate ventilation space on both sides of the units (2" minimum), especially if the units are being stacked

STEP 4: Connect your Multi-Mode Fiber Optic cables between the Transmitter and Receiver:
L1/Tx to L1/Rx
L2/Tx to L2/Rx
L3/Tx to L3/Rx

L1: Data Tx to Rx and Video 1
L2: Data Rx to Tx
L3: Video 2




2

STEP 2: Connect your desktop devices (monitors, keyboard, mouse, etc.) to the Receiver using standard cables.

RACK-MOUNT OR DESK-TOP OPTIONS: Like all Thinklogical™ KVM extenders, the VelocityKVM-24 can be mounted in a standard EIA 19" rack or on a shelf or desk-top.



Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting.



2 Mounting bracket screws in four places.

VELOCITY-24_Quick_Start_Rev_B



PHONE: (800) 291-3211
WEBSITE: www.thinklogical.com
EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of Thinklogical products.